GENERAL PLANTING NOTES:

1. SURVEY INFORMATION OBTAINED ELECTRONICALLY. KLA STUDIOS CANNOT ATTEST TO THE ACCURACY OR RELIABILITY OF LEGAL BOUNDARIES, EASEMENTS OR FIELD GATHERED

2. THE LOCATION OF THE EXISTING UNDERGROUND UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO COMMENCING WORK AND AGREES TO BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE OCCASIONED BY THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.

3. ALL DIMENSIONS ARE TAKEN TO FACE OF CURB OR BUILDING WHERE APPLICABLE UNLESS OTHERWISE NOTED. USE DIMENSIONAL INFORMATION GIVEN. DO NOT SCALE DRAWINGS.

4. CONTRACTOR SHALL REFER QUESTIONS ON MATERIALS, FINISHES, LABOR, AND/OR PERFORMANCE STANDARDS NOT SPECIFIED HEREIN TO THE LANDSCAPE ARCHITECT.

5. ALL CHANGES TO DESIGN OR PLANT SUBSTITUTIONS ARE TO BE AUTHORIZED BY THE LANDSCAPE ARCHITECT.

6. CONSULT PLANT SCHEDULE FOR PLANT SIZES AND SPECIFICATIONS. CONTRACTOR IS RESPONSIBLE FOR ALL PLANTS DRAWN ON PLANS. PLANT LIST QUANTITIES ARE FOR CONVENIENCE ONLY.

7. ALL PLANTS TO CONFORM TO THE AMERICAN STANDARD FOR NURSERY STOCK (ANSI-Z60.1-2014) IN REGARDS TO SIZING, GROWING AND B&B SPECIFICATIONS.

8. ALL PROPOSED PLANTING BEDS TO BE TILLED TO A MINIMUM DEPTH OF 12".

9. ALL PLANTING BEDS TO BE FERTILIZED WITH 10-10-10 OR APPROVED EQUAL.

10. PLANTING HOLES TO BE DUG A MINIMUM OF TWICE THE WIDTH AND 6-8 INCHES DEEPER THAN THE SIZE OF THE ROOT BALL OF BOTH SHRUB AND TREE AND TO BE AMENDED WITH ORGANIC SOIL CONDITIONER.

11. IN AREAS WHERE BEDROCK OR HEAVILY COMPACTED ROCK FILL IS ENCOUNTERED, THE PLANTING HOLES ARE TO BE DUG TO A MINIMUM OF THREE TIMES THE WIDTH AND ONE FOOT DEEPER THAN THE SIZE OF THE ROOT BALL. NOTIFY LANDSCAPE ARCHITECT IF FIELD CONDITIONS WARRANT ADJUSTMENT OF PLANT LOCATIONS.

12. CONTRACTOR TO PROVIDE A FULL 1 YEAR GUARANTEE ON ALL PLANTS INSTALLED AND PROVIDE COMPLETE MAINTENANCE ON ALL WORK DONE BEGINNING ON THE DAY OF APPROVAL FROM OWNER'S REPRESENTATIVE AND CONTINUING FOR A THREE MONTH DURATION AT WHICH TIME OWNER'S REPRESENTATIVE WILL DECLARE JOB ACCEPTANCE

13. ALL EXISTING PLANT MATERIAL SHOWN ON THIS PLAN IS TO BE PRESERVED UNLESS SPECIFICALLY NOTED OTHERWISE.

14. ALL SHRUBS AND GROUND COVER BEDS (EXISTING AND NEW), PLANTING BEDS, AND SHRUB MASSES SHALL HAVE A MINIMUM 3" DEEP SHREDDED HARDWOOD BARK MULCH. MULCH HEDGES IN A CONTINUOUS BED.

15. EXISTING GRASS TO BE REMOVED, IF PRESENT, AND TOPSOIL TO BE SPREAD SMOOTH AND HAND-RAKED TO REMOVE ALL ROCKS AND DEBRIS LARGER THAT 1 INCH IN DIAMETER PRIOR TO LAYING SOD OR SEEDING.

16. ALL AREAS DISTURBED BY CONSTRUCTION ARE TO BE RESTORED, FINE GRADED AND SEEDED. (SEE LANDSCAPE PLANS). SEEDING OR SODDING BY LANDSCAPE CONTRACTOR.

17. IF APPLICABLE LANDSCAPE CONTRACTOR TO COORDINATE WITH EXISTING OR PROPOSED IRRIGATION SYSTEM.

AND,

→ 775 Yard Street, Suite 325

■ www.ma-architects.com


J p 614 764 0407

f 614 764 0237

NIMAL

Columbus, Ohio 43212







LANDSCAPE PLAN 18 OCTOBER 2021

GENERAL PLANTING NOTES:

1. SURVEY INFORMATION OBTAINED ELECTRONICALLY. KLA STUDIOS CANNOT ATTEST TO THE ACCURACY OR RELIABILITY OF LEGAL BOUNDARIES, EASEMENTS OR FIELD GATHERED

2. THE LOCATION OF THE EXISTING UNDERGROUND UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES PRIOR TO COMMENCING WORK AND AGREES TO BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE OCCASIONED BY THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.

- 3. ALL DIMENSIONS ARE TAKEN TO FACE OF CURB OR BUILDING WHERE APPLICABLE UNLESS OTHERWISE NOTED. USE DIMENSIONAL INFORMATION GIVEN. DO NOT SCALE DRAWINGS.
- 4. CONTRACTOR SHALL REFER QUESTIONS ON MATERIALS, FINISHES, LABOR, AND/OR PERFORMANCE STANDARDS NOT SPECIFIED HEREIN TO THE LANDSCAPE ARCHITECT.
- 5. ALL CHANGES TO DESIGN OR PLANT SUBSTITUTIONS ARE TO BE AUTHORIZED BY THE LANDSCAPE ARCHITECT.
- 6. CONSULT PLANT SCHEDULE FOR PLANT SIZES AND SPECIFICATIONS. CONTRACTOR IS RESPONSIBLE FOR ALL PLANTS DRAWN ON PLANS. PLANT LIST QUANTITIES ARE FOR CONVENIENCE ONLY.
- 7. ALL PLANTS TO CONFORM TO THE AMERICAN STANDARD FOR NURSERY STOCK (ANSI-Z60.1-2014) IN REGARDS TO SIZING, GROWING AND B&B SPECIFICATIONS.
- 8. ALL PROPOSED PLANTING BEDS TO BE TILLED TO A MINIMUM DEPTH OF 12".
- 9. ALL PLANTING BEDS TO BE FERTILIZED WITH 10-10-10 OR APPROVED EQUAL.
- 10. PLANTING HOLES TO BE DUG A MINIMUM OF TWICE THE WIDTH AND 6-8 INCHES DEEPER THAN THE SIZE OF THE ROOT BALL OF BOTH SHRUB AND TREE AND TO BE AMENDED WITH ORGANIC SOIL CONDITIONER.
- 11. IN AREAS WHERE BEDROCK OR HEAVILY COMPACTED ROCK FILL IS ENCOUNTERED, THE PLANTING HOLES ARE TO BE DUG TO A MINIMUM OF THREE TIMES THE WIDTH AND ONE FOOT DEEPER THAN THE SIZE OF THE ROOT BALL. NOTIFY LANDSCAPE ARCHITECT IF FIELD CONDITIONS WARRANT ADJUSTMENT OF PLANT LOCATIONS.
- 12. CONTRACTOR TO PROVIDE A FULL 1 YEAR GUARANTEE ON ALL PLANTS INSTALLED AND PROVIDE COMPLETE MAINTENANCE ON ALL WORK DONE BEGINNING ON THE DAY OF APPROVAL FROM OWNER'S REPRESENTATIVE AND CONTINUING FOR A THREE MONTH DURATION AT WHICH TIME OWNER'S REPRESENTATIVE WILL DECLARE JOB ACCEPTANCE
- 13. ALL EXISTING PLANT MATERIAL SHOWN ON THIS PLAN IS TO BE PRESERVED UNLESS SPECIFICALLY NOTED OTHERWISE.
- 14. ALL SHRUBS AND GROUND COVER BEDS (EXISTING AND NEW), PLANTING BEDS, AND SHRUB MASSES SHALL HAVE A MINIMUM 3" DEEP SHREDDED HARDWOOD BARK MULCH. MULCH HEDGES IN A CONTINUOUS BED.
- 15. EXISTING GRASS TO BE REMOVED, IF PRESENT, AND TOPSOIL TO BE SPREAD SMOOTH AND HAND-RAKED TO REMOVE ALL ROCKS AND DEBRIS LARGER THAT 1 INCH IN DIAMETER PRIOR TO LAYING SOD OR SEEDING.
- 16. ALL AREAS DISTURBED BY CONSTRUCTION ARE TO BE RESTORED, FINE GRADED AND SEEDED. (SEE LANDSCAPE PLANS). SEEDING OR SODDING BY LANDSCAPE CONTRACTOR.
- 17. IF APPLICABLE LANDSCAPE CONTRACTOR TO COORDINATE WITH EXISTING OR PROPOSED IRRIGATION SYSTEM.

ANIM,

→ 775 Yard Street, Suite 325


J p 614 764 0407

f 614 764 0237

Columbus, Ohio 43212

■ www.ma-architects.com

kla studios 9240 Robinhood Circle Westerville Ohio 43082 614.530.5273 bking@kla-studios.com www.kla-studios.com








LANDSCAPE PLAN 18 OCTOBER 2021

10.18.21 PERMIT SET

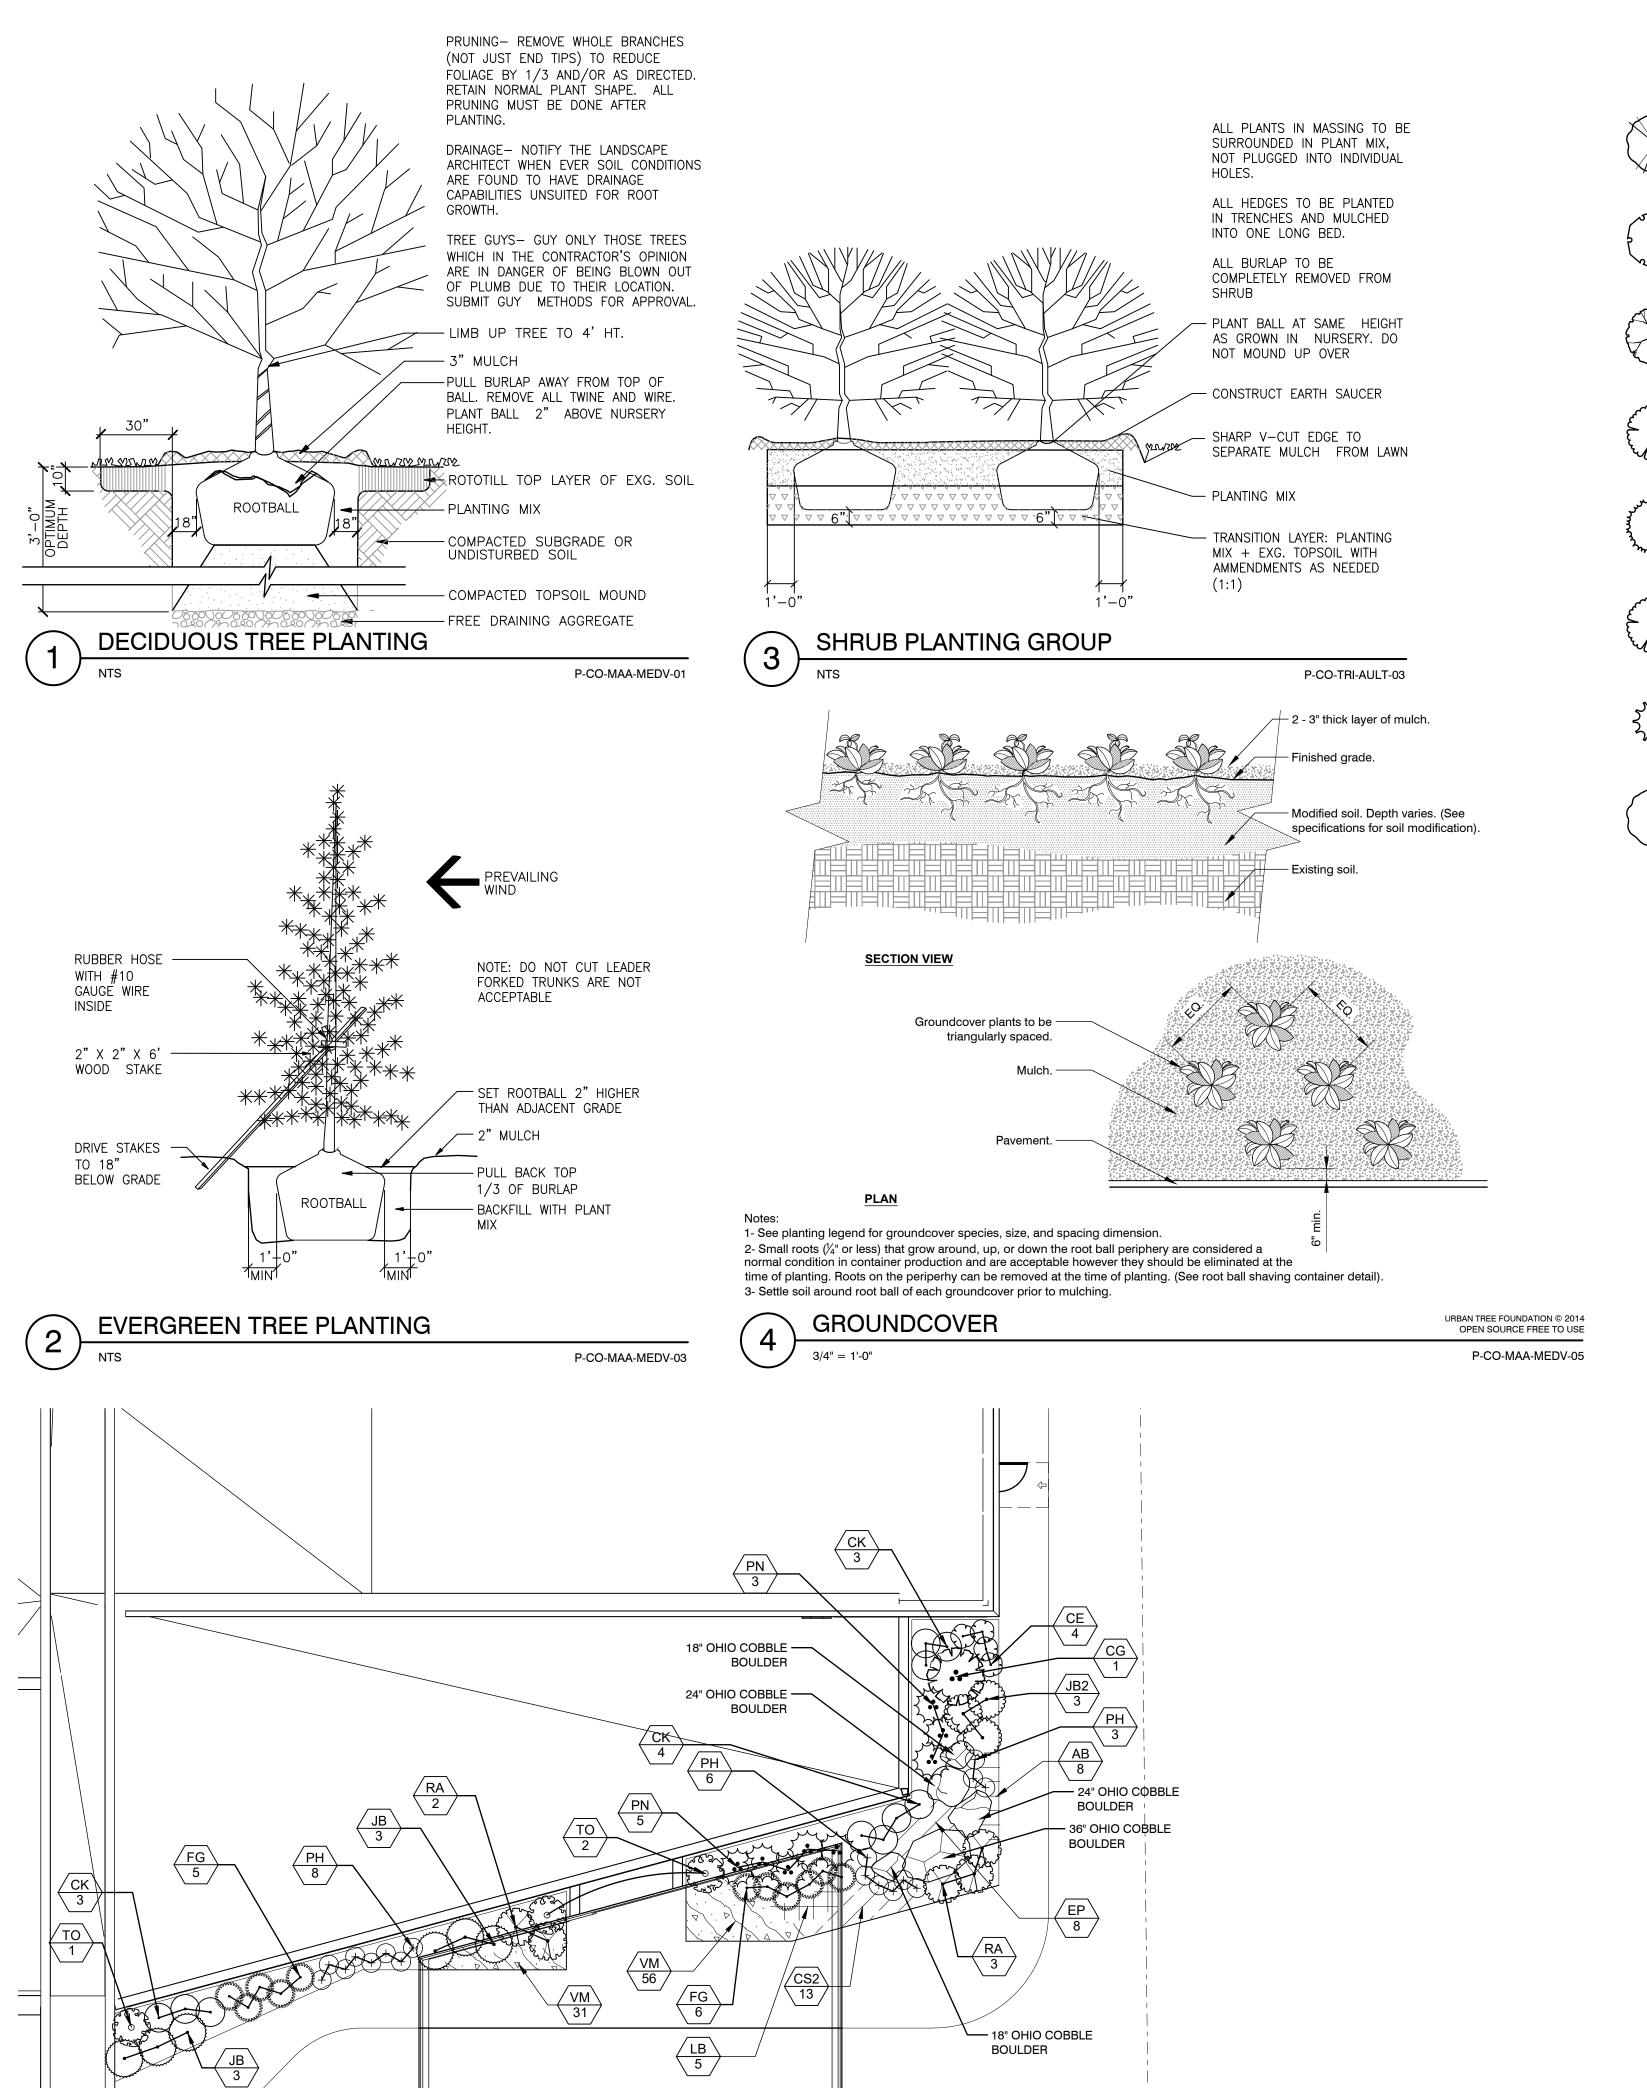


LOBBY ENTRY

	TREES	CODE	BOTANICAL NAME	COMMON NAME	<u>SIZE</u>	CONTAINER		<u>QTY</u>	<u>REMARKS</u>
		AA	Acer freemanii `Autumn Blaze`	Autumn Blaze Maple	2" Cal.	B&B		2	
		AR2	Acer rubrum `October Glory` TM	October Glory Maple	2" Cal.	B&B		6	
		CG	Cedrus atlantica 'Glauca Pendula'	Weeping Blue Atlas Cedar	4` Ht.	В&В		1	SPECIMAN TREE
	(+)	СО	Cercis canadensis `Covey` `Lavender Twist`	Lavender Twist Redbud	1.5" Cal.	B&B		3	
		CA	Chamaecyparis nootkatensis `Green Arrow`	Green Arrow Alaskan Cedar	4` Ht.	B&B		10	
		MP	Malus x `Prairifire`	Prairifire Crab Apple	1.5" Cal.	B&B		3	
		MS	Malus x `Snowdrift`	Snowdrift Crab Apple	1.5" Cal.	B&B		3	
	£.,	MG	Metasequoia glyptostroboides	Dawn Redwood	2" Cal.	B&B		4	
	wull by the second	PG	Picea glauca	White Spruce	5` Ht.	B&B		7	
	A CONTRACTOR OF THE CONTRACTOR	PS	Pinus strobus	White Pine	5` Ht.	B&B		5	
		QC	Quercus coccinea	Scarlet Oak	2" Cal.	B&B		2	
	£	SI	Syringa reticulata `Ivory Silk`	Ivory Silk Japanese Tree Lilac	2" Cal.	B&B		3	
	• • • • • • • • • • • • • • • • • • • •	TD	Taxodium distichum	Bald Cypress	2" Cal.	B&B		14	
		TS	Thuja occidentalis `Smaragd`	Emerald Green Arborvitae	5` Ht.	B&B		27	
		TC2	Tilia cordata	Littleleaf Linden	2" Cal.	B&B		4	
		UL	Ulmus x `Liberty`	Elm	2" Cal.	B&B		2	
		ZV	Zelkova serrata `Village Green`	Sawleaf Zelkova	2" Cal.	B&B		10	
	SHRUBS •	CODE BG	BOTANICAL NAME Buxus x `Green Velvet`	COMMON NAME Boxwood	<u>SIZE</u> 3 gal.	CONTAINER		<u>QTY</u> 62	REMARKS
	\odot	CK	Calamagrostis x acutiflora `Karl Foerster`	Feather Reed Grass	3 gal			24	
	\odot	CE	Chamaecyparis pisifera `Lime Pie`	`Lime Pie` Sawara Cypress	3 gal			4	
	Marie Company	FG	Fothergilla gardenii	Dwarf Fothergilla	3 gal.			11	
	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	JS	Juniperus chinensis `Sea Green`	Sea Green Juniper	3 gal.			77	
	Ö	JB2	Juniperus conferta `Blue Pacific`	Blue Pacific Juniper	3 gal			3	
	$\odot$	JB	Juniperus sabina `Broadmoor`	Broadmoor Juniper	3 gal			12	
	+	PH	Pennisetum alopecuroides `Hameln`	Hameln Dwarf Fountain Grass	1 gal			17	
014 SE <del>-</del> 05	$\odot$	RO	Physocarpus opufolius	Summer Wine Nine Bark	3 gal			4	
05	<b>*</b>	PN	Picea abies `Nidiformis`	Nest Spruce	3 gal			8	
		RA	Rhus aromatica `Gro-Low`	Gro-Low Fragrant Sumac	3 gal			5	
		SL2	Schizachyrium scoparium	Little Bluestem Grass	1 gal			17	
	5 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	SN	Sorghastrum nutans	Indian Grass	2 gal			19	
		ТО	Thuja occidentalis `Zematlik`	Zematlik Arborvitae	3 gal.			3	AVAILABLE AT DANNAHER LANDSCAPE AND NURSURY, GALENA OHIO
	( <u></u> )	VC3	Viburnum carlesii	Korean Spice Viburnum	5 gal			2	
	GROUND COVERS	CODE	BOTANICAL NAME	COMMON NAME	<u>SIZE</u>	CONTAINER	SPACING	QTY	REMARKS
		AB	Aster x `Blue Autumn`	Hardy Aster	4"pot		18" o.c.	8	
		CS2	Coreopsis verticillata `Sienna Sunset`	Sienna Sunset Tickseed	4"pot		18" o.c.	13	
		EP	Echinacea purpurea	Purple Coneflower	4"pot		18" o.c.	8	
		LB	Liriope muscari `Big Blue`	Big Blue Lilyturf	1 gal		24" o.c.	5	
	STATE OF THE STATE	VM	Vinca major	Periwinkle	FLAT		12" o.c.	87	

PLANT SCHEDULE






→ 775 Yard Street, Suite 325 **J** p 614 764 0407 f 614 764 0237


www.ma-architects.com

ANIMAL


CUYAHOO

PLANT LIST AND DETAILS 18 OCTOBER 2021

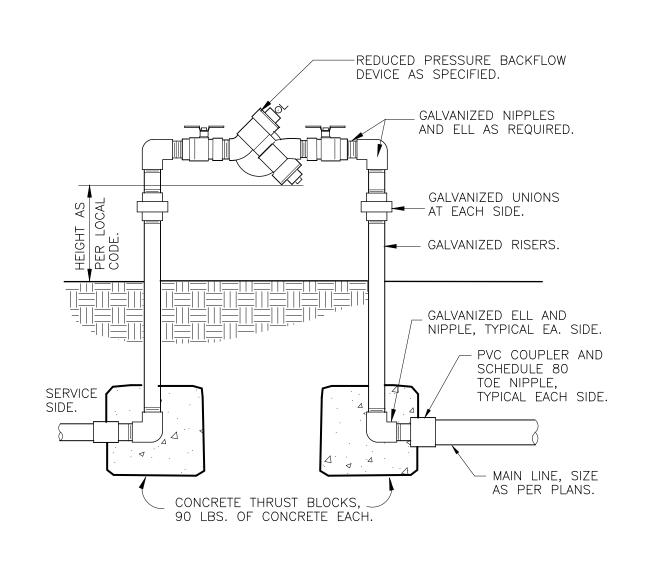

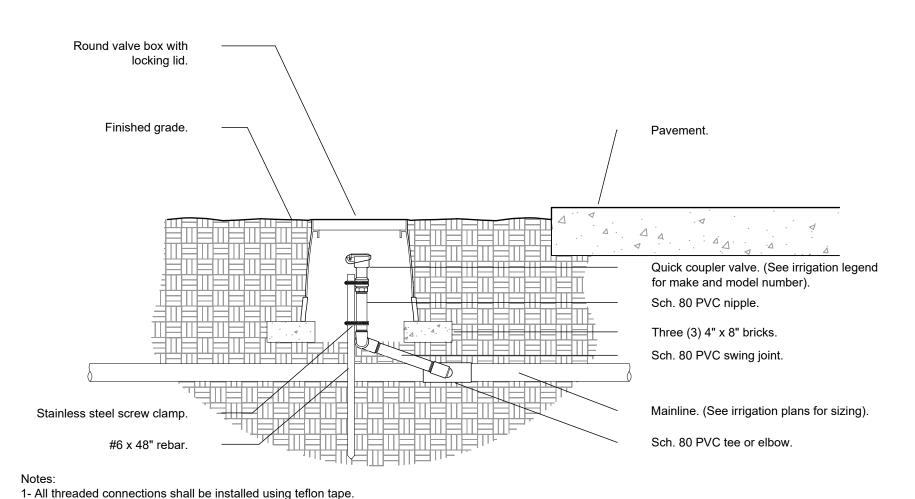

—CONTROLLER WIRE WITH 30 INCH LINEAR 20"X14" JUMBO PLASTIC LENGTH OF COIL, WITH PLASTIC I.D. TAG AND VALVE BOX. WATERPROOF CONNECTORS. PVC TRUE UNION BALL_ - RCV AS SPECIFIED. — FILTER AS SPECIFIED. - PRESSURE REGULATOR AS 2" ABOVE GRADE AT SPECIFIED. SHRUBS. — PVC UNION W/ SHORT SET BOX FLUSH NIPPLES. AT TURF. <del>X</del>—x<del>—,x,—,x,—,x,—,x</del>——x— OUTLET PIPE SAME SIZE AS— SCH. 80 RISER. VALVE, 24" MIN. LENGTH TO FIRST FITTING. 45° DOWN AS REQ. TO ——— LATERAL PIPE DEPTH. SxT TEE W/ 2" NIPPLE AT MAINLINE. TWO 6X2X16 CONCRETE BLOCK CAPS, ONE ½" WIRE CLOTH GOPHER ON EACH SIDE OF THE BOX. SCREEN, WRAP UP SIDES.

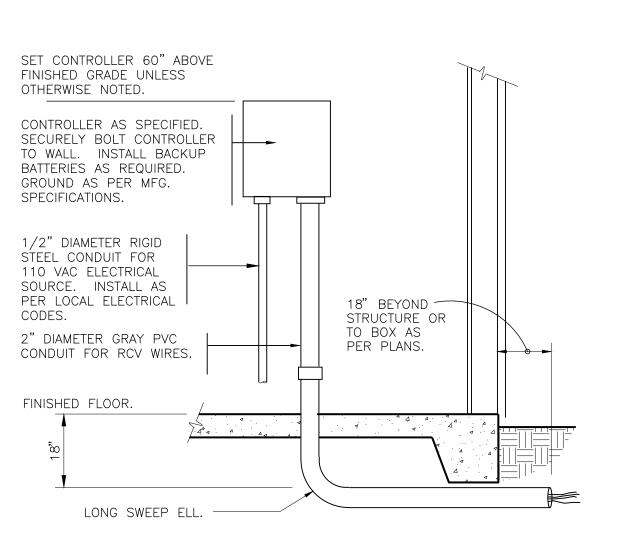

REDUCED PRESSURE BACKFLOW DEVICE

FX-IR-FX-BACK-03

NTS

3- All quick couplers shall be installed a minimum of 18" off of the mainline. 4- Valve boxes shall be located in planting areas.

> QUICK COUPLER VALVE OPEN SOURCE FREE TO USE


1" DRIP VALVE/FILTER/REGULATOR 1 1/2" = 1'-0"


DETAIL-FILE

INTERIOR WALL MOUNT CONTROLLER


FX-IR-FX-DRIP-12

FX-IR-FX-CONT-20

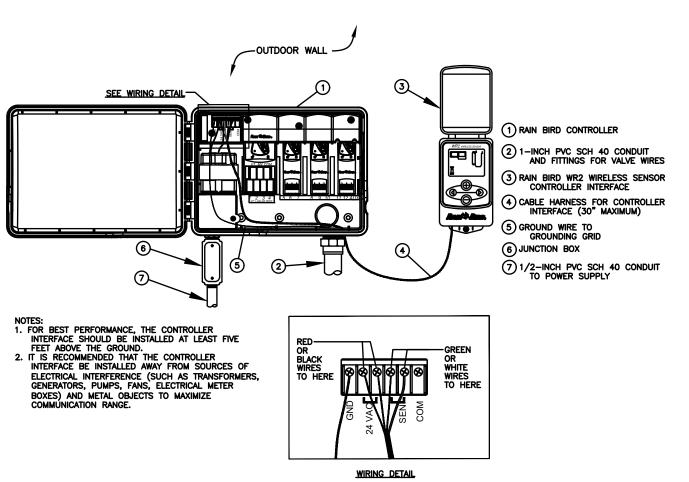

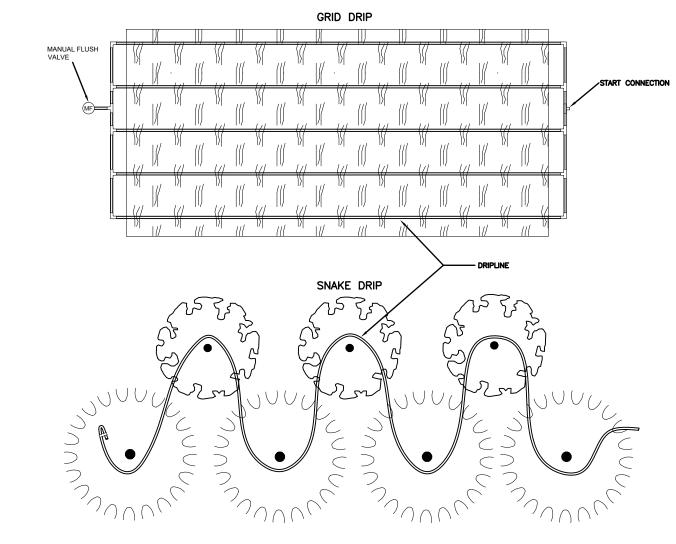

2- Valve box shall be wrapped with a minimum 3 mil thick plastic and secured to the valve box using duct tape or electrical tape.

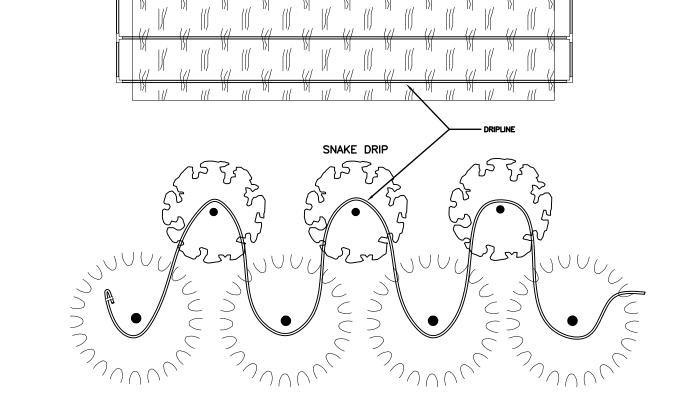



TYPICAL DRIP TUBING LAYOUT 6



1-800-347-4272

http://www.projectservices.siteone.com 650 Stephenson Highway Troy, Michigan 48083 Phone 248.588.2100 Fax 248.588.3528 www.Siteone.com 800.347.4272


kla studios

9240 Robinhood Circle Westerville Ohio 43082

614.530.5273 bking@kla-studios.com www.kla-studios.com

Project Services Number: 267750 MEDVET COLUMBUS

WESTERVILLE, OH, 43082 Design Date: 10/13/21 CH Drawn By: C.PERRY Checked By:





J 775 Yard Street, Suite 325 Columbus, Ohio 43212 **J** p 614 764 0407 f 614 764 0237

■ www.ma-architects.com

ANIMA

, CUYAHOGA

CLEVELAND,

18 OCTOBER 2021

chite a